



EVANTAGE SOLUTIONS SDN BHD






Computerized Maintenance Management System (CMMS)

USER MANUAL

Barcode Printer Configuration

(Argox CP-2140M PPLB)

TABLE OF CONTENT

1. Setting up and Configure Argox CP-2140M PPLB Printer	4
1.1 Press  button and search for Printers & scanners.	4
1.2 Click on Printers & scanners to open the setting.....	4
1.3 In the windows setting, select on Argox CP2140M PPLB and click 	5
1.4 Click on Printing preferences	6
1.5 On the pop-up window, click on Page Setup tab.	7
1.6 Select USER (2.36 in x 1.57 in) and click  button.	7
1.7 Follow steps below to configure the Preset setting for USER (2.36 in x 1.57 in)	8
1.7.1 In Label Size area, input the value as below and click 	8
1.8 Choose Portrait for the Orientation preferences.	9
1.9 Click on  to set new Preset.....	9
1.10 Click  to adjust the positioning adjustment.	10
1.10.1 Input the offset value as below	10
1.11 Click  to save the changes.....	10
1.12 Click  to save the configuration.	11
1.13 Click  to save and close the windows.	11

DOCUMENT CONTROL

Document No : CMMS/BARCODE/001
Document Name : Print Barcode - Asset
Prepared By : Mohd Ezwan Bin Ab Sani
Creation Date : 10/12/2021
Revision : 1.0


DOCUMENT REVISION HISTORY

Revision No	Revision Date	By	Description of Changes
1.0	10/12/2021	Ezwan	First Version of User Manual – Barcode Printer


1. Setting up and Configure Argox CP-2140M PPLB Printer

1.1 Press  button and search for Printers & scanners.

1.2 Click on Printers & scanners to open the setting.

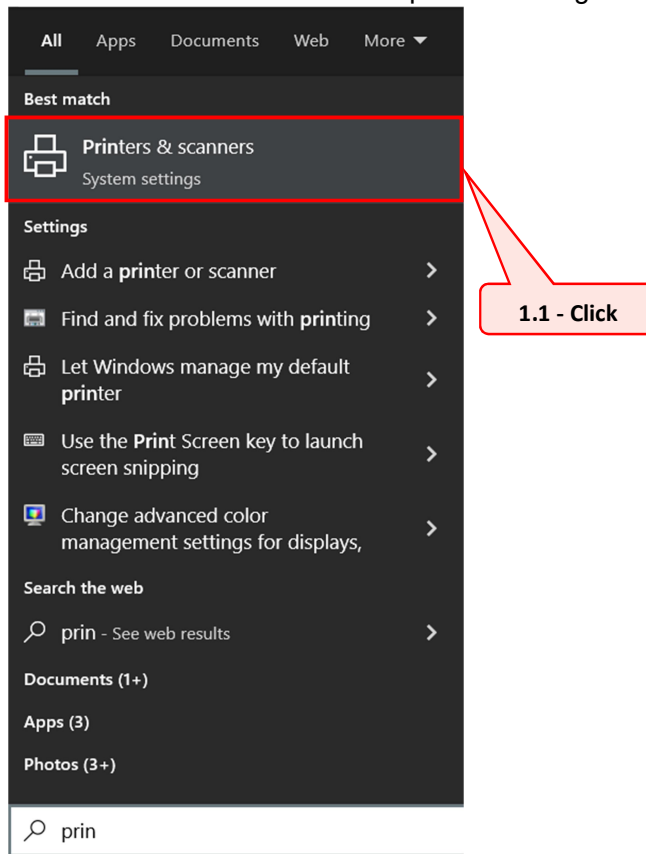

1.3 In the windows setting, select on Argox CP2140M PPLB and click Manage

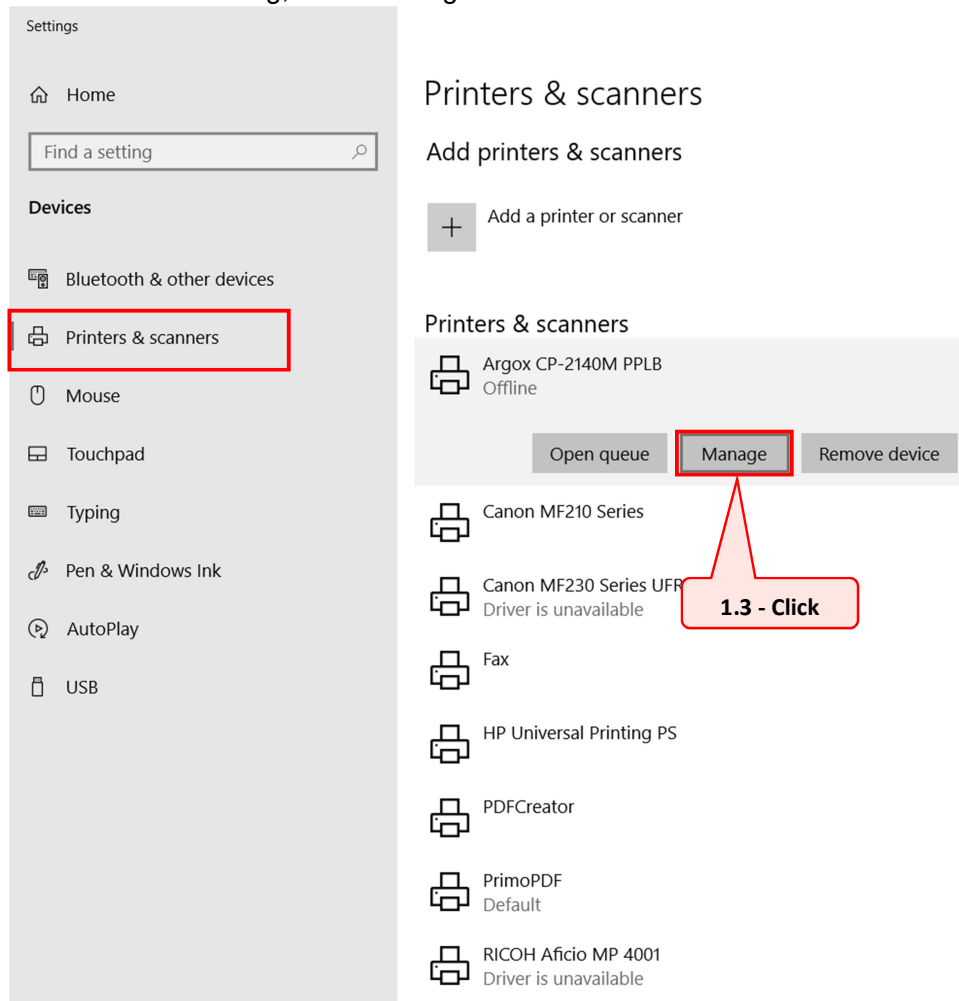

1.4 Click on Printing preferences

← Settings

🏠 Argox CP-2140M PPLB

Manage your device

Printer status: Offline

Open print queue

Set as default

Print a test page

Run the troubleshooter

Printer properties


Printing preferences

Hardware properties

1.4 - Click

1.5 On the pop-up window, click on **Page Setup** tab.

1.6 Select USER (2.36 in x 1.57 in) and click **Edit...** button.

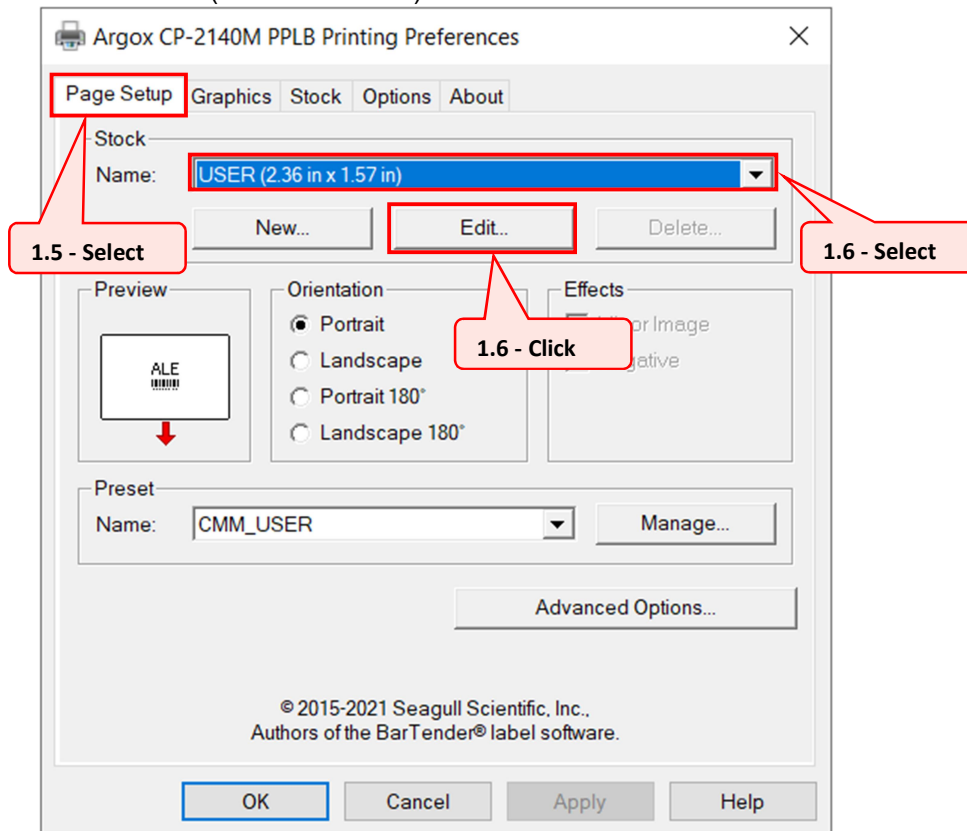

1.7 Follow steps below to configure the **Preset** setting for **USER (2.36 in x 1.57 in)**.

1.7.1 In **Label Size** area, input the value as below and click

Width: **2.36 in**


Height: **1.57 in**

The screenshot shows the 'Edit Stock' dialog box with the following fields and annotations:

- Stock Name:** USER
- Type:** Die-Cut Labels
- Label Size:** Width: 2.36 in, Height: 1.57 in (This section is highlighted with a red box and labeled '1.7 - Input').
- Exposed Liner Widths:** Left: 0.00 in, Right: 0.00 in
- Preview:** A preview of the label stock.
- Buttons:** OK, Cancel, Help (The OK button is highlighted with a red box and labeled '1.7.1 - Click').

1.8 Choose **Portrait** for the **Orientation** preferences.

1.9 Click on **Manage...** to set new Preset.

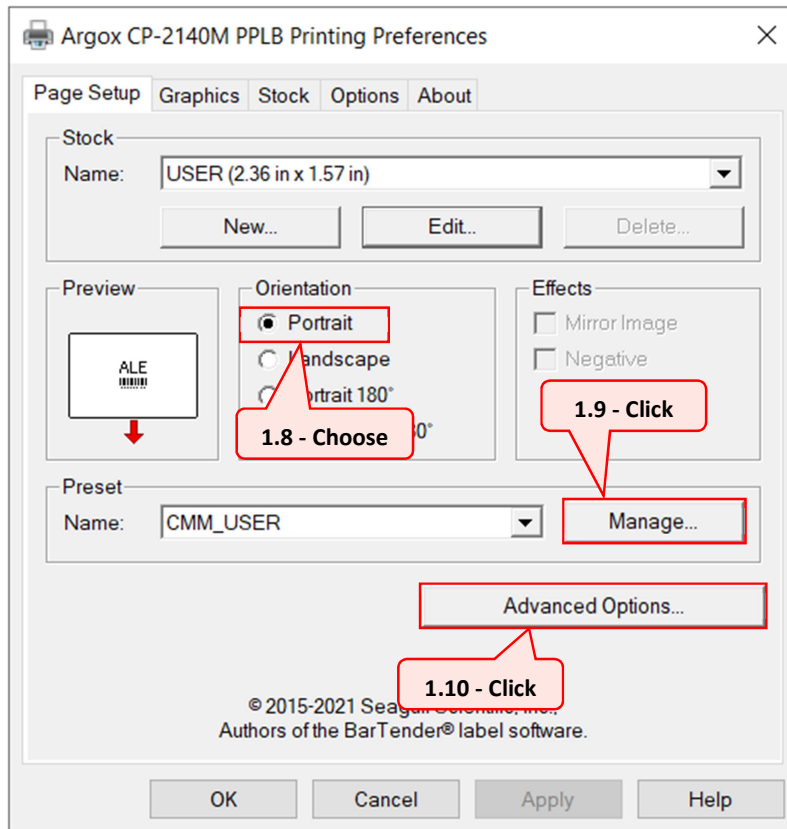


1.10 Click to adjust the positioning adjustment.

1.10.1 Input the offset value as below

Horizontal Offset: 0.10 in

Vertical Offset: 0.00 in

1.11 Click to save the changes.

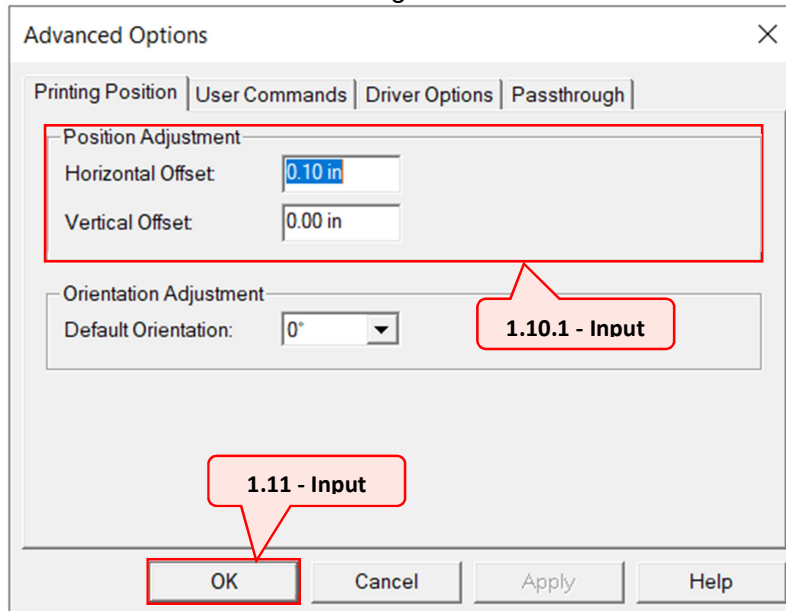

1.12 Click  to save the configuration.

1.13 Click  to save and close the windows.

